

# DOOR PHONE

for PBX

## LINK DOOR PHONE



IP Camera



- IP / WIFI camera
- PBX / Wireless\* connexion
- Modularity up to 50 configurations
- Surface / embedded mounting

**LINK DOOR PHONE simple, modular and evolutionary.**

**LINK Door phone** can be connected as well on **PBX FxS** or on **analog PSTN line**.

**LINK Door Phone** associated with our **DECT BOX GAP** allows a **wireless connexion** to any proprietary **GAP DECT base** and **DECT GAP phone**.

The **LINK Door phone** principal module is evolutionary **up to 64 buttons**. Other modules can be added such as **IP/WIFI camera**, **keypad** and **loud speaker** for noisy area.

**LINK Door phone** is provided with **2 relays** for lock control, a **backlit case** and a **heating system**.

Its modularity allows a **great flexibility** in use, installation and evolution.

### Advantages

- o IP/WIFI camera
- o PBX FxS / Analog PSTN line connexion
- o More than 50 configurations
- o 2 relays control
- o 64 buttons maximum
- o PC configuration (MS Windows)
- o Remote programming by DTMF code
- o Backlit case
- o Heating system
- o Surface or embedded mounting
- o Digital keyboard for call with preset code
- o Compatible with all PBX
- o Day & night service management
- o Flash / Pause / Tones programmable



## Models

- Link Door Phone 2 buttons (Main module)
- Link Door Phone Keypad (Additional module)
- Link Door Phone IP or Wifi IP camera (Additional module)
- Link Door names with 4 buttons (Additional module) back lighted
- Link Door Phone amplified speaker for noisy environment

## Features

### Settings

- Through DTMF or PC
- > **Remote management through PSTN**

### Power supply

- 12 volts ~/ = (for light and door)
- Module is powered buy analogue line


### Environment

- Storage Temperature range: -20°c/+70°c
- Operating Temperature range: -20°c/+70°c
- Humidity: 10% to 80% at 30°c

### Dimensions (l x h x p) in mm


- Box 1 module: 156 x 153 x 80
- Box 2 modules: 156 x 240 x 80
- Box 3 modules: 156 x 330 x 80

## Functioning

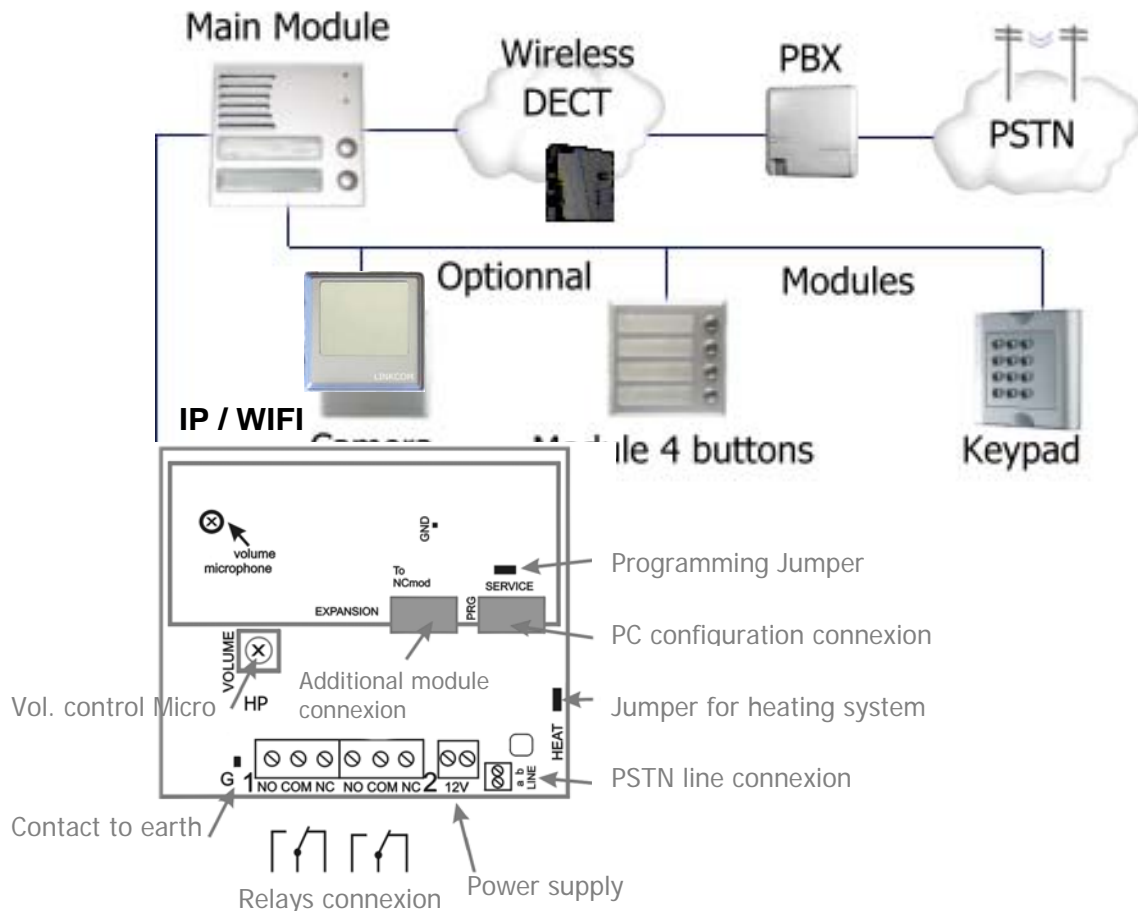

## Accessories

- Cases for surface mounted
- Cases for embedded mounted
- Module with labels for companies' names
- DECT Module for wireless connection

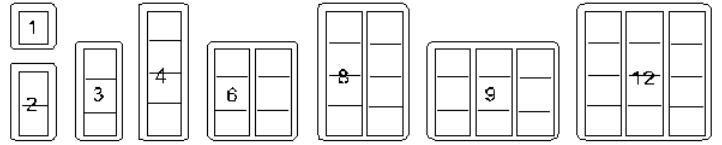

Complete module  
Surface mounted/embedded



Base embedded



Surface mounted

### LINKCOM

11, rue du Soleil Levant – 92140 Clamart – France  
 Tel : +33 (0)1 40 83 13 13 – Fax : +33 (0)1 46 31 76 75  
[www.linkcom.net](http://www.linkcom.net) – [info@linkcom.net](mailto:info@linkcom.net)

Publication Number : 1004-01/45320/22412

- Documentation commerciale sans valeur juridique -